



规格承认书

SPEC FOR APPROVAL

客户名称 Customer	
客户料号 Customer P/N	
我司型号 Model	SK-IRM0038R-H-DIP-03
产品名称 Product Name	红外接收头


客户确认(Customer Signatures)		
编制(Edit)	审核(Check)	核准(Approval)



LED 光生物安全性



产品外形尺寸 Package outline dimensions

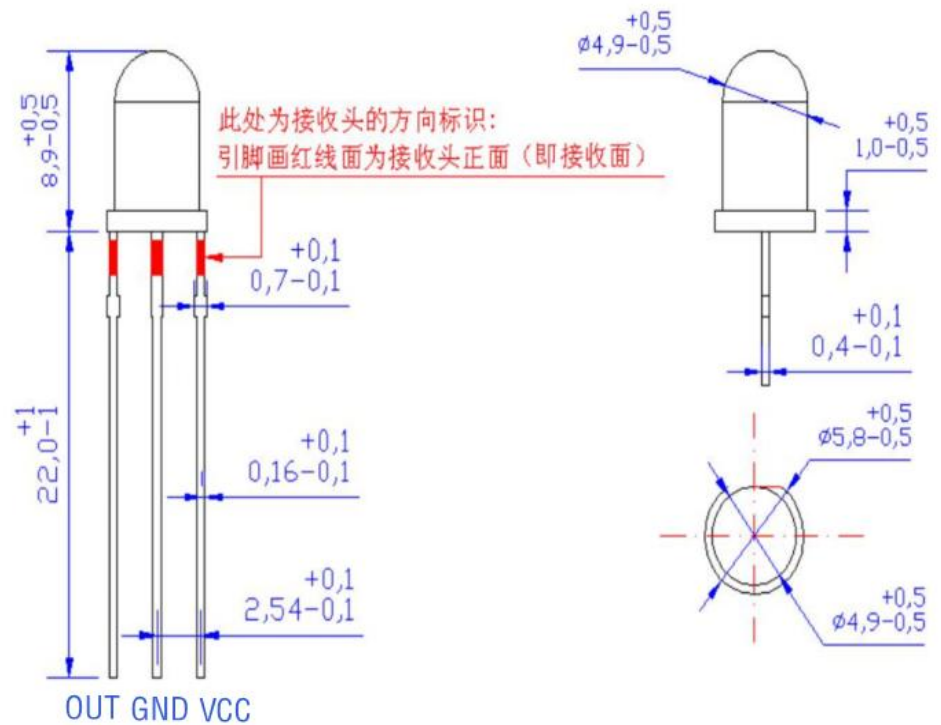

备注: 所有尺寸单位均为 mm, 如无特殊说明误差范围为 ± 0.15 mm

红外接收头为 IC 化红外线受光元件, 将光二极管与特殊指令集积体电路(ASIC)共同组合封装而成的产品, 可简化及小型化应用商品之电路设计。

The infrared receiving head is a IC-infrared light receiving element that combines the optical diode with the special instruction collector circuit (ASIC), which can simplify and minimize the circuit design of the application commodity

特性 Features

- 小型设计; Small-scale design;
- 内置专用 IC; Built-in dedicated IC;
- 宽角度及长距离接收; Wide-angle and long-distance reception
- 抗干扰能力强; Strong anti-interference ability
- 能抵于环境光线影响; Can against the impact of ambient light
- 低电压工作; Low-voltage operation

应用

- 视听器材 (音响, 电视, 录影机, 碟机、机顶盒、DVB)

Audio-visual equipment (audio, TV, video recorder, disc machine, set-top box, DVB)


- 家庭电器 (冷气机, 电风扇, 电灯) Home appliances (air cooler, electric fan, electric lamp)

- 其他无线遥控器产品; Other wireless remote control products


额定参数 Absolute Maximum Ratings (Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Condition	最小 Min	典型 Type	最大 Max	单位 Unit
工作电压 Working voltage	V _{CC}		2.7	5	5.5	V
载波频率 Carrier frequency	f ₀			37.9		KHZ
接收角度 Receive the angle	2θ _{1/2}	距离衰减 1/2 Distance attenuation of 1 / 2		+/-35		V
接收距离 Receiving distance	L	L5IR=300MA (测试信号)	10	12	--	M
BMP 宽度 BMP width	F _{BW}	-3Db Band width	--	8.0	--	KHZ.
静态电流 quiescent current	I _{CC}	I _{in} =0 μA, V _{CC} =3V	--	0.9	1.5	mA
		I _{in} =0 μA, V _{CC} =5V	--	1.0	1.5	
低电平输出 Low-level output	V _{OL}	V _{in} =0V I _{sink} =2.0mA	--	0.2	0.4	V
高电平输出 High-level output	V _{OH}	V _{CC} =3V	2.7	3.0		V
		V _{CC} =5V	4.7	5.0		
输出脉冲宽度 Output pulse width	T _{PWL}	V _{in} =500 μV _{p-p} ※	500	600	700	us
	T _{PWH}	V _{in} =50mV _{p-p} ※	500	600	700	


测试波形 Test the waveform

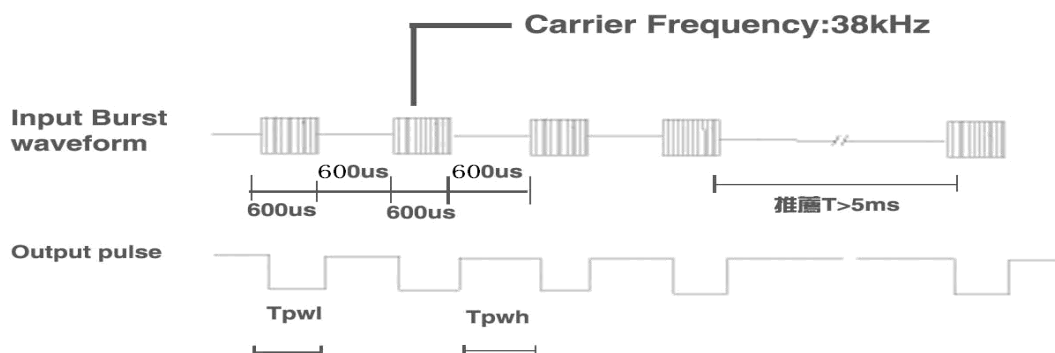


应用电路图 Application of the electrical circuit diagrams

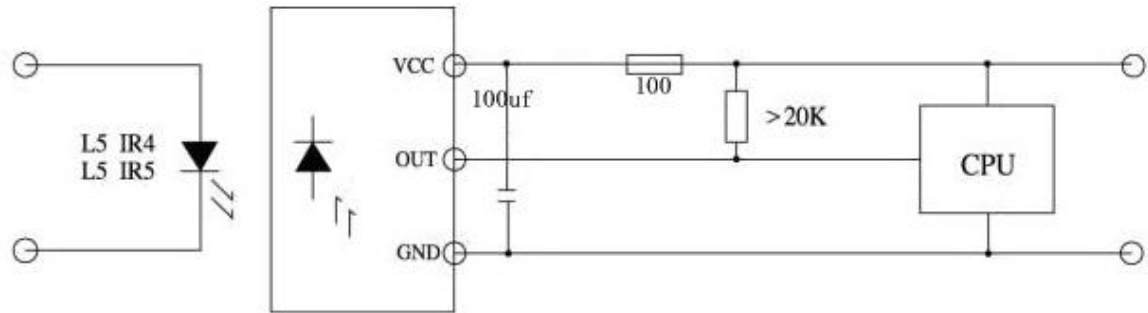

原理图 Schematic diagram

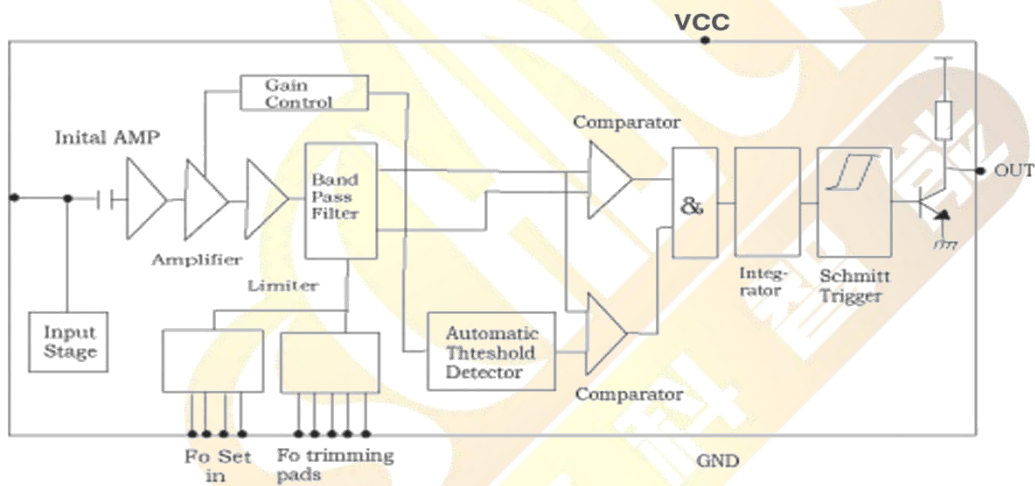

接收角度图 Receive the angle diagram

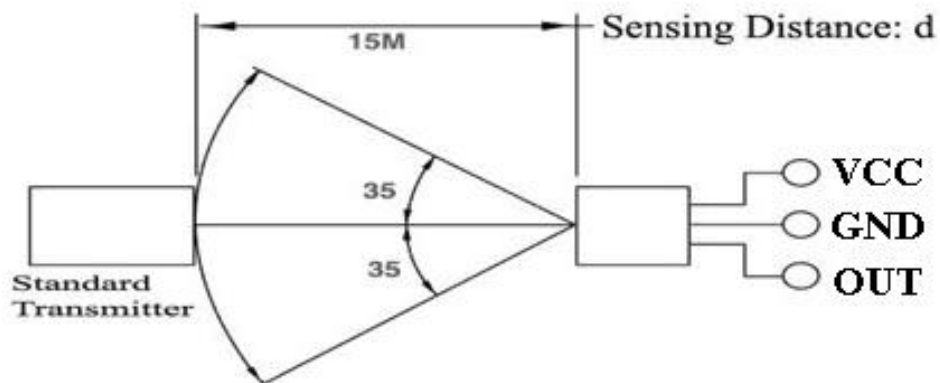

光电特性曲线 Typical elector-optical characteristics curves

Fig.1 Relative Supply Current Vs Supply Voltage

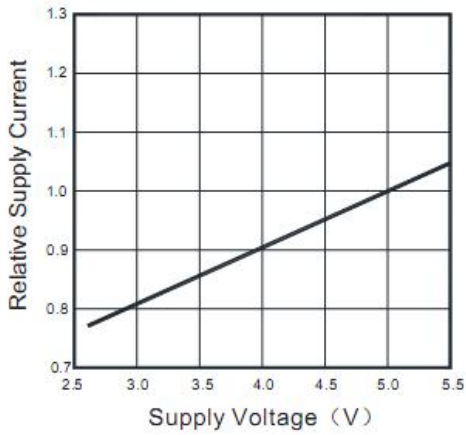


Fig.2 Relative Supply Current Vs Ambient Temperature

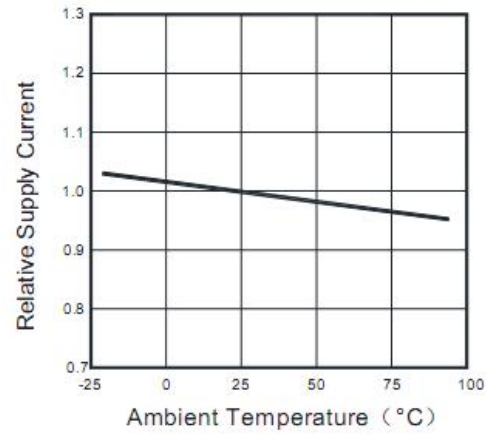


Fig. 3 - Relative sensitivity VS Relative Frequency

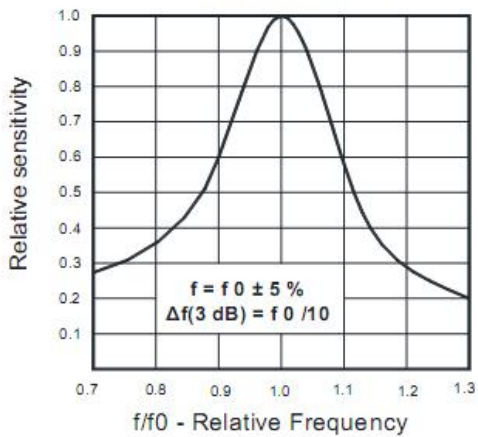


Fig.4 Relative Photo current Vs Irradiance

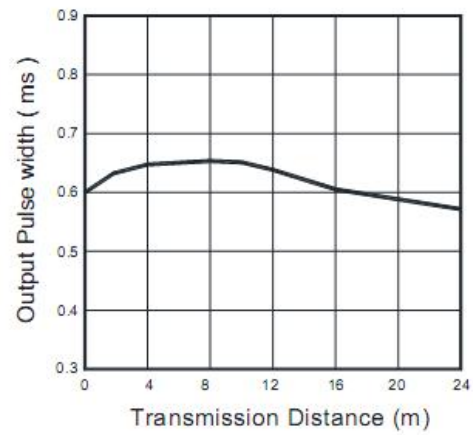


Fig.5 - Relative Sensitivity vs Sensitivity angle


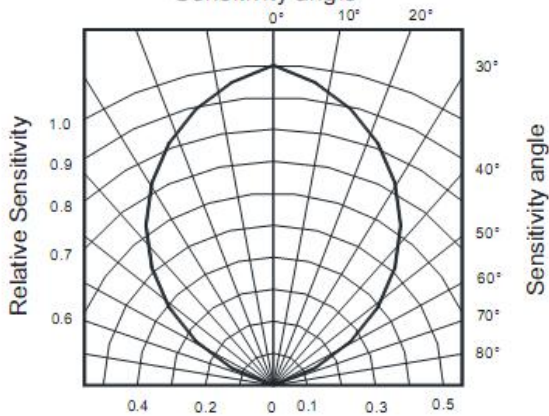



Fig.6 Relative Spectral Sensitivity vs Wavelength

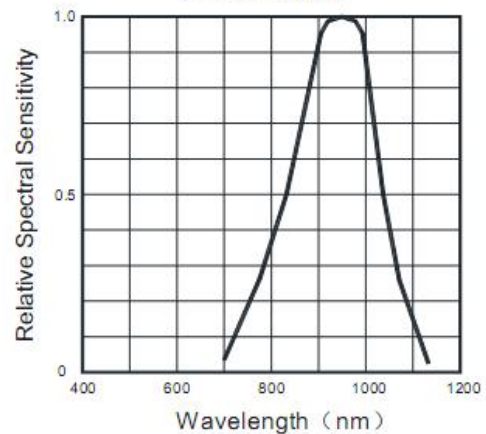

推荐焊接条件 Recommended Soldering Conditions

焊接模式 Mode		固定形式 Fixed form
手工焊接 Manually Soldering	烙铁温度 Soldering Iron Temperature	最高温度 300℃(功率最大 30 瓦) 300℃ Max(30w Max)
	焊接时间 Soldering Time	时间不超过 3 秒 3 sec Max
	焊接位置 Soldering Position	大于 3mm (从焊点到胶体) 3mm Min.(Form soldering joint to colloid)
波峰焊接 Wave Soldering	预热 Preheat	最高温度 100℃ 不超过 60 秒 100℃ Max.60 sec.Max
	温度 Temperature	最高 260℃ 260℃ Max.
	焊接时间 Soldering Time	不超过 5 秒 5 sec Max
锡炉焊接 Solder pot Soldering	预热 Preheat	最高温度 100℃ 不超过 60 秒 100℃ Max.60 sec.Max
	浸焊温度 Preheat Temperature	最高 260℃ 260℃ Max.
	浸焊时间 Soldering Time	不超过 5 秒 5 sec Max
	焊接位置 Soldering Position	大于 2mm (从焊点到胶体) 2mm Min.(From soldering joint to colloid)

加工注意事项:

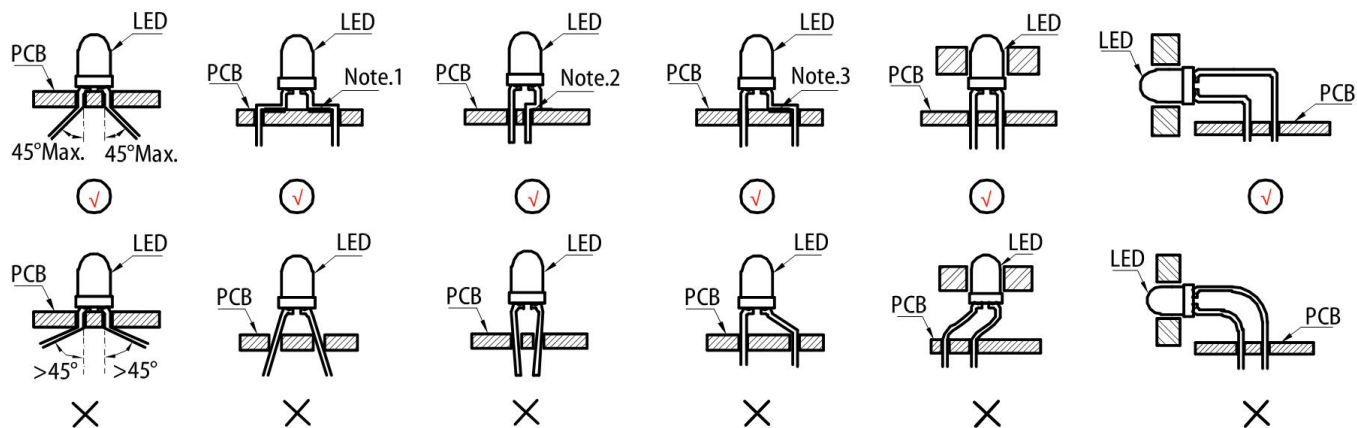

■ 储存 Storage

- 在温度不高于 30℃，湿度不高于 60%RH 的条件下，产品保存期限为 6 个月。将产品保存在密封的容器中并附带干燥剂可以在一定程度上延续产品的储存日期。不良的储存条件会导致产品引脚的腐蚀或产品性能的改变。

Under the storage conditions of 30℃ or less and humidity less than 60%RH, the storage period of LED is 6months. Store the products in sealed container with moisture absorbent material could prolong the storage time to a certain extent. Bad storage conditions may cause the LED pin corrode or LED characteristics be changed. It is recommended that the LEDs be used as soon as possible.

- 开封后,产品必须 24 小时内使用完(建议工作环境温度不高于 30℃,湿度不高于 60%),如未使用完,余料须存放在温度不高于 30℃,湿度不高于 10%的环境中。

After opening package, the product should be soldered within 24 hours. If not, please store at 30℃ or less and humidity less than 10%RH. It is recommended that the product be operated at the workshop condition of 30℃ or less and humidity less than 60%RH.

- 对于尚未焊接的 LED,如果吸湿剂或包装失效,或者产品没有符合以上有效存储条件,烘烤可以起到一定的性能恢复效果. 烘烤条件:65±5℃,持续时间 24H.

For the LED doesn't solder ,if the moisture absorbent material lose efficacy or the storage condition doesn't conform to the above description,baking can help performance recovery in some extent.Backing condition : 65±5℃ for 24 hours.

■ 静电 Static electricity


- 静电和电涌会导致产品特性发生改变，例如正向电压降低等，如果情况严重甚至会损毁产品，所以在使用时必须采取有效的防静电措施。所有相关的设备和机器都应该正确的接地，同时必须采取其他防静电和电涌的措施。使用防静电手环，防静电垫子，防静电工作服，工作鞋，手套，防静电容器，都是有效的防止静电和电涌的措施。

Static and electric surge would change the features of LED,such as decreasing of forward voltage.Even damages may occur in serious conditions.Please make sure adopt effective anti-static measures. All the relative devices and machinery must be properly grounded. At the same time, it is recommended to use anti-static wrist bands,anti-electrostatic gloves, anti-electrostatic containers and so on to prevent static and electric surge.




可靠性焊接温度（A 图、B 图）Soldering temperature curve chart（figure A、figure B）

A 图波峰焊

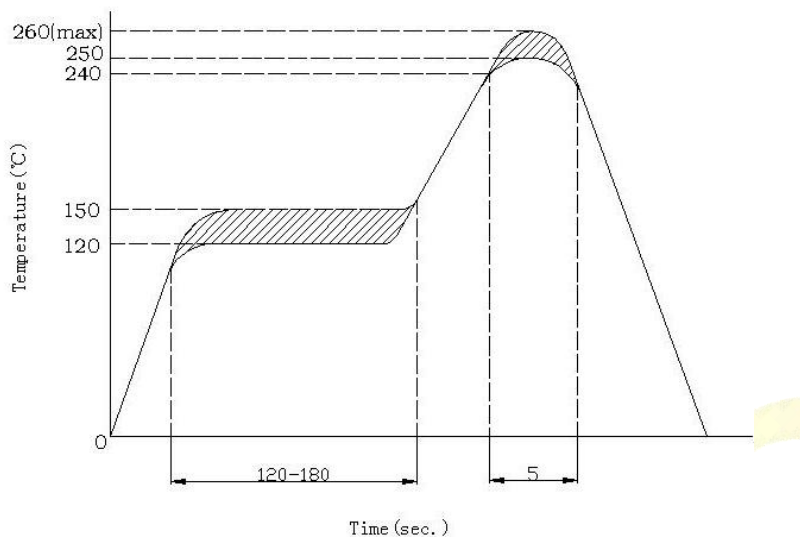

B 图回流焊

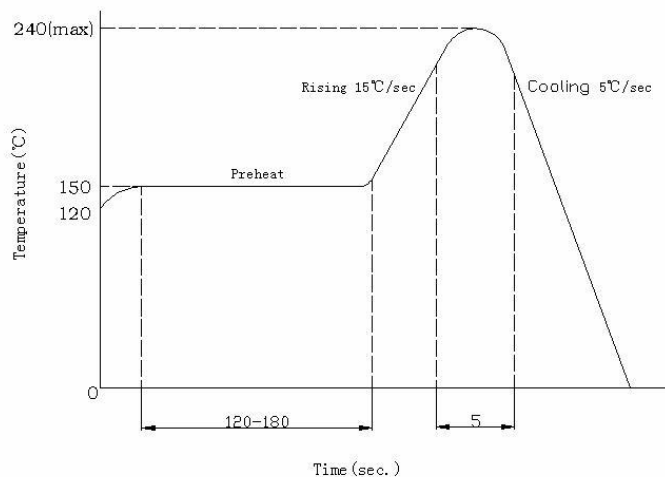

可靠性试验 Reliability Test

测试项目 Test Parameter	测试条件 Test Condition	时间 Time	样品数 Quantity	Ac/Re
耐焊接热 Resistance to Solder Heat	260°C±5°C	10 sec	22PCS	0/1
冷热循环 temperature cycle	+100°C(15min) 5min -10°C(15min)	50 cycles	22PCS	0/1
冷热冲击 Thermal Shock	+105°C(30min) 5min -45°C(30min)	50 cycles	22PCS	0/1
高温贮存 High Temperature storage	+100°C	1000H	22PCS	0/1
低温贮存 Low Temperature storage	-40°C	1000H	22PCS	0/1
寿命测试 Life Test	V _{CE} =5V	1000H	22PCS	0/1
高温高湿 High Temperature and High Humidity Test	85°C&85%R.H	168H	22PCS	0/1

包装规格 Packing Specification

最小包装：500PCS/包 Minimum package: 5, 00 PCS/ package